


TAPEPRO

DRYWALL TOOLS

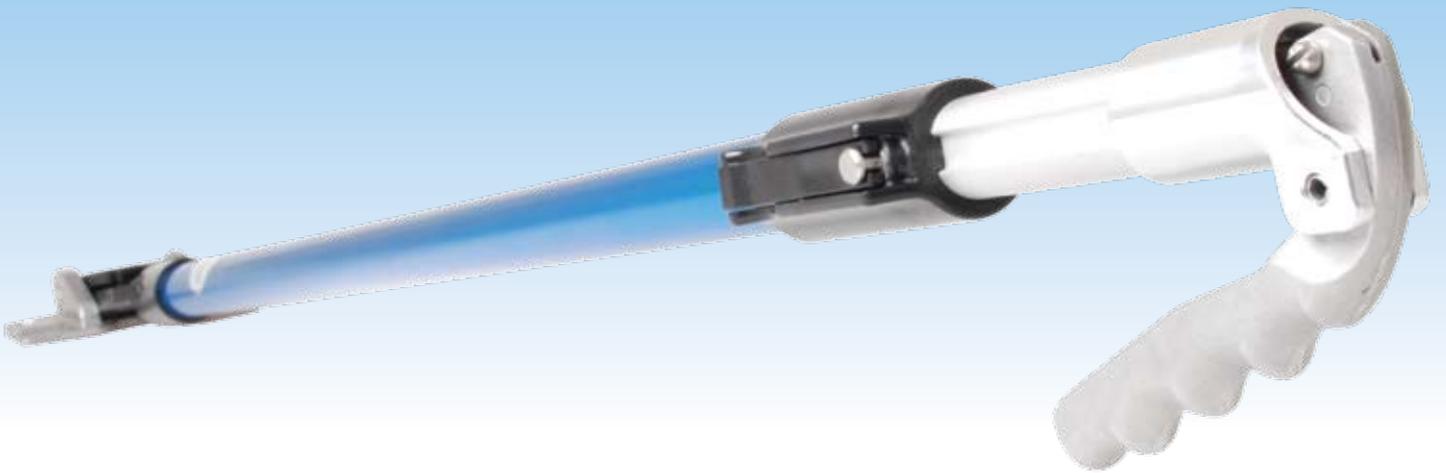

PROREACH
EXTENDABLE HANDLES

PRO-REACH™ FLATBOX HANDLE

PRO-REACH™ FLATBOX HANDLE

The Tapepro Pro-Reach™ Extendable Flatbox Handle is designed for use with the Tapepro range of Flat Finishing Boxes.

Code: FHX


Features:

- Length 980mm to 1600mm
- Weight 1.4kg
- Durable anodised tubes
- Anodised head for increased wear resistance
- Same comfortable tube size and ergonomic grip
- Same all position brake

USING THE TAPEPRO EXTENDABLE HANDLE

1. First loosen the wingnuts on your Tapepro Flatbox lid. (FHX-1)
2. Attach the Pro-Reach™ Flatbox Handle to your Flatbox by sliding the handle onto the box lid so that the slots in the connector plate align with the studs in the Flatbox lid.
3. Tighten the wingnuts to secure the handle to the Flatbox. (FHX-2)
4. Adjust the handle to the desired length by depressing the lever shown in figure FHX-3.
5. The handle has four positions - extend the handle to the desired length releasing the lever and allowing the locating pin to drop into the appropriate hole.
6. Check the operation of the brake before applying a load.

Note: The handle grip must be released to adjust the length of the handle. Also the locating pin must be engaged for the brake to work.

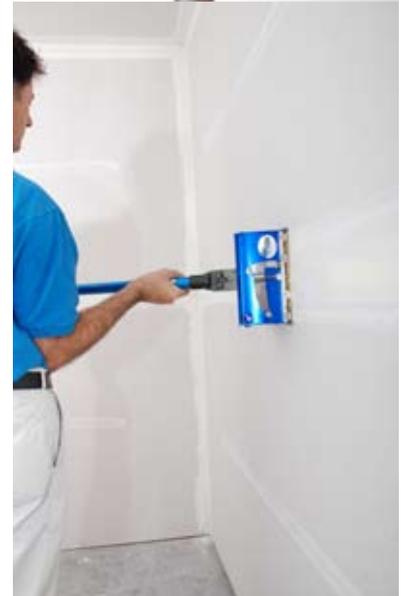

CLEANING

Your Pro-Reach™ Flatbox Handle should be cleaned after each use to maximise the lifespan and maintain optimal performance.

Use water and a brush - do not use solvents.

Ensure that the inner tube is cleaned as dry joint compound will affect smooth extension of the handle.

MAINTENANCE

To maintain your Pro-Reach™ Flatbox Handle, follow the following points:


- Clean the handle after use.
- Lubrication of the inner tube should only be as required (if at all) and is best achieved by wiping lubricant onto the tube with a cloth.
- Do not spray lubricant onto the tube, especially where it can enter the inside of the inner tube. Inside the inner tube is a brake mechanism to link the strap and rod which should not be lubricated, and may fail to function if it is.
- Do not lubricate the handle head brake where the FH004 pin pivots.



WARRANTY

All manufacturing faults are covered under the Tapepro warranty. All non wear parts are covered under a 3 year warranty.



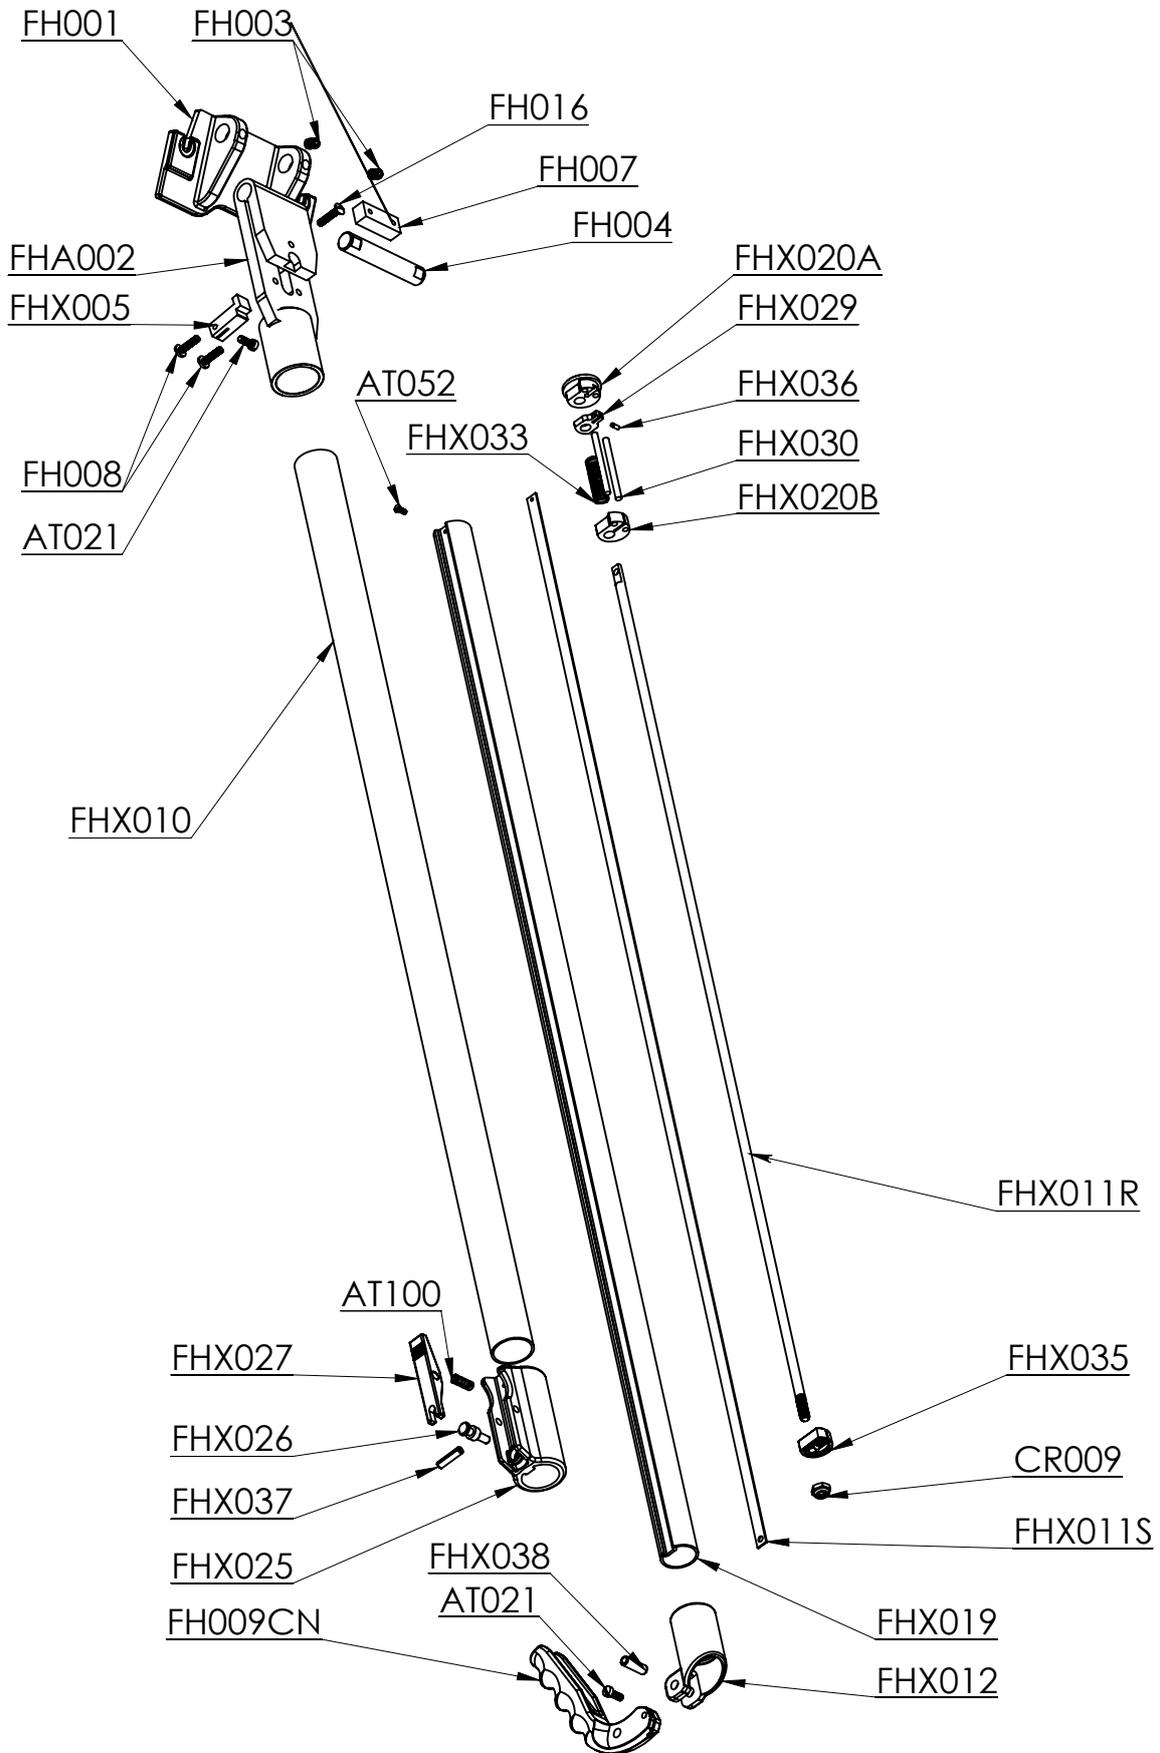

TAPEPRO
DRYWALL TOOLS

For further information contact: TAPEPRO DRYWALL TOOLS: 2/44 Dover Drive; West Burleigh QLD 4220 Australia
 Phone: +61 7 5520 6022 | Fax: +61 7 5520 5973 | Email: info@tapepro.com | Website: www.tapepro.com